

## Technical Specifications

- Bluetooth® Specification V3.0 class 2
- RF frequency range: 2.402-2.480GHZ, 2.4G ISM band
- Radio performance: Receive Sensitivity of -92dBm, TX Power Max 4dBm
- Supports Bluetooth headset and handsfree profiles, support A2DP
- 4 button design: easy-to-operate On/Off slide switch, MFB, VOL+, VOL-
- LED indicator status: blue, red
- Rechargeable li-polymer battery
- Micro 5 pin charging port
- Nominal charging time: max 2 hours
- Talk time: up to 7.5 hours
- Standby time: up to 220 hours
- Operating temperature: -10°C~50°C
- Storage temperature: -20°C~60°C

## Features

- Cancels out unwanted background noise, leaving your conversation crystal clear.
- Provides 7.5 hours of continuous wireless hands-free talk.
- Provides 220 hours of standby time.
- Easily pair/disconnect to your mobile device using the ON/OFF switch.
- Provides in-ear ergonomic fit with extra ear gels and ear hooks that can be worn on either ear.
- Control your volume from the headset.
- Rechargeable battery charges by USB cable to either wall outlet (using AC Charger adapter) or your computer's USB port.

## 1-Year Limited Warranty

Premier Accessory Group, LLC warrants that the enclosed product will be free from defects in materials and workmanship for a period of 1 year from the date of initial retail purchase. This warranty is for the original retail purchaser only and is not transferrable. This warranty does not cover damage caused by accident, unreasonable use or modifications to the product. During the 1-Year Warranty period we will either repair or replace this product (at our option). Please include a money order or cashier's check for the amount of \$4.95 for shipping and handling of this product. Send product to:


Premier Accessory Group  
Attn: Product Support Center  
11-11 44th Drive  
Long Island City, N.Y. 11101

This guarantee gives you specific legal rights, and you may also have other rights which vary from state to state.

Energizer and other marks, including graphics, are trademarks of Energizer and are used under license. All other trademarks, brand names or product names are the property of their respective owners and are not affiliated with Energizer or Premier Accessory Group, LLC.

© 2012 Premier Accessory Group, LLC. All rights reserved.  
Questions? Visit [www.PremierAccessoryGroup.com](http://www.PremierAccessoryGroup.com) or call 1-888-492-8338 Toll Free

## Functions

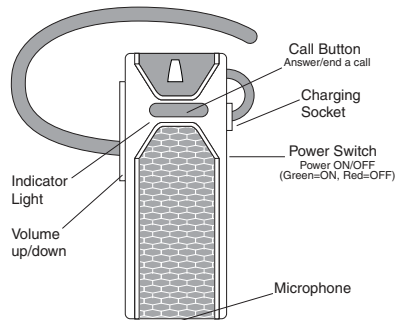

## Basic use:

1. To make a call, use your phone in the normal way when the headset is connected to your phone.
2. To answer a call, press and release the Call Button or press the answer key on your mobile phone.
3. To end a call, press and release the Call Button or press the answer key on your mobile phone.
4. To redial the last number, press and hold the volume up button for 3 seconds.

**Note:** Not all phones support this feature.

5. To reject an incoming call, press and hold the Call Button for 3 seconds until you hear a short beep.
6. To adjust the volume, press volume up or volume down to increase or decrease the volume level.
7. To mute the microphone (place the call on hold), press and hold the volume down button for 3 seconds. You will hear a beep.
8. To unmute the microphone (take the call off hold), press and hold the volume down button for 3 seconds. You will hear a beep.

## Charging the headset:

1. Connect the charging pin of the USB cable to the charging socket of the headset.
2. Connect the other end of the USB cable to either the AC Charger (and plug into a wall A/C outlet) or the computer's USB port.

The red LED indicator light turns on while the headset is charging.

The red LED indicator light shuts off when the headset is fully charged (approximately 2-3 hours).

**Note:** When the battery is running low, the red LED indicator light starts to flash along with a warning beep.

**Note:** Unplug the charger from the wall outlet and the device when not in use. Do not leave a fully charged battery connected to a charger, since overcharging may shorten its lifetime.

## Switching the headset on/off:

1. To switch on, set the Power Switch to the ON position (green). The indicator light will flash blue.
2. To switch off, set the Power Switch to the OFF position (red). The indicator light will flash red before the headset shuts off.

## Pairing for the first time:

1. Ensure the Bluetooth headset is within 3 feet of your mobile phone or Bluetooth enabled device.
2. Set the Power Switch to the ON position.
3. When the indicator light flashes red and blue alternately, you can connect the headset to your Bluetooth enabled device.

**Note:** If the first time pairing was unsuccessful or for future pairing, manually pair the headset to your Bluetooth enabled device.

## Manually pairing the headset:

1. Ensure the Bluetooth headset is within 3 feet of your mobile phone or Bluetooth enabled device.
2. Set the Power Switch to the ON position.
3. Press and hold the Call Button until the indicator light flashes red and blue alternately. The blinking red and blue lights indicate that the headset is in pairing mode.
4. Set your mobile phone to search for Bluetooth devices. When your mobile phone finds the headset, confirm by selecting ENGBT1003 from the list.
5. Enter the passcode "0000" when prompted by the phone. Select "Pair" to complete the pairing process.

**Note:** If the Bluetooth version of your Bluetooth mobile phone is V2.1, you will not need to enter a passcode during above pairing process.

6. If the pairing is successful, the headset's indicator light turns to standby mode and flashes once every three seconds.

Energizer and other marks, including graphics, are trademarks of Energizer and are used under license. All other trademarks, brand names or product names are the property of their respective owners and are not affiliated with Energizer or Premier Accessory Group, LLC.